查询EDI88130CS供应商

128Kx8 Monolithic SRAM, SMD 5962-89598

FEATURES

- Access Times of 15*, 17, 20, 25, 35, 45, 55ns
- Battery Back-up Operation
  - 2V Data Retention (EDI88130LPS)
- $\overline{CS}_1$, CS2 & $\overline{OE}$ Functions for Bus Control
- Inputs and Outputs Directly TTL Compatible
- Organized as 128Kx8
- Commercial, Industrial and Military Temperature Ranges
- Thru-hole and Surface Mount Packages JEDEC Pinout
  - 32 pin Sidebrazed Ceramic DIP, 400 mil (Package 102)
  - 32 pin Sidebrazed Ceramic DIP, 600 mil (Package 9)
  - 32 lead Ceramic SOJ (Package 140)
  - 32 pad Ceramic Quad LCC (Package 12)
  - 32 pad Ceramic LCC (Package 141)
  - 32 lead Ceramic Flatpack (Package 142)
- Single +5V (±10%) Supply Operation

The EDI88130CS is a high speed, high performance, 128Kx8 bits monolithic Static RAM.

An additional chip enable line provides system memory security during power down in non-battery backed up systems and memory banking in high speed battery backed systems where large multiple pages of memory are required.

The EDI88130CS has eight bi-directional input-output lines to provide simultaneous access to all bits in a word.

A low power version, EDI88130LPS, offers a 2V data retention function for battery back-up applications.

Military product is available compliant to MIL-PRF-38535.

**15ns access time is advanced information, contact factory for availability.*

FIG. 1 PIN CONFIGURATION

32 DIP
32 SOJ
32 CLCC
32 FLATPACK
TOP VIEW

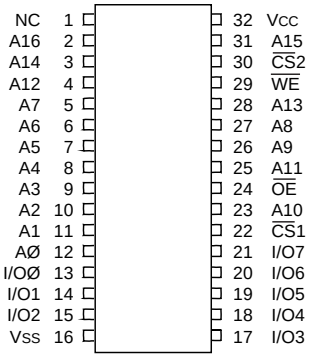

32 QUAD LCC
TOP VIEW

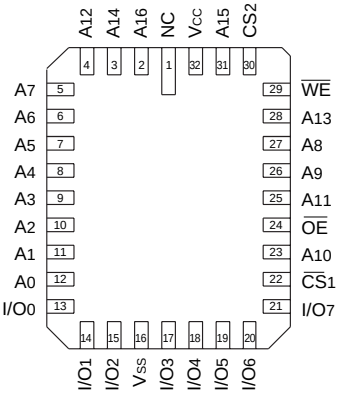

PIN DESCRIPTION

I/O0-7	Data Inputs/Outputs
A0-16	Address Inputs
$\overline{WE}$	Write Enable
$\overline{CS}_1$, CS_2	Chip Selects
$\overline{OE}$	Output Enable
Vcc	Power (+5V ±10%)
Vss	Ground
NC	Not Connected

BLOCK DIAGRAM

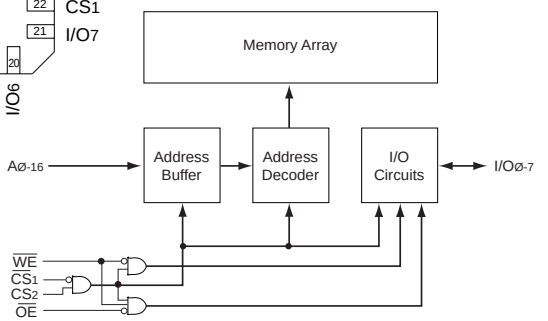

ABSOLUTE MAXIMUM RATINGS

Parameter		Unit
Voltage on any pin relative to Vss	-0.2 to 7.0	V
Operating Temperature T_A (Ambient)		
Industrial	-40 to +85	°C
Military	-55 to +125	°C
Storage Temperature, Ceramic	-65 to +150	°C
Power Dissipation	1.7	W
Output Current	40	mA
Junction Temperature, T_J	175	°C

NOTE:
Stress greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions greater than those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage	V_{CC}	4.5	5.0	5.5	V
Supply Voltage	V_{SS}	0	0	0	V
Input High Voltage	V_{IH}	2.2	—	V_{CC} +0.5	V
Input Low Voltage	V_{IL}	-0.5	—	+0.8	V

TRUTH TABLE

$\overline{OE}$	$\overline{CS_1}$	CS_2	$\overline{WE}$	Mode	Output	Power
X	H	X	X	Standby	High Z	I_{CC2}, I_{CC3}
X	X	L	X	Standby	High Z	I_{CC2}, I_{CC3}
H	L	H	H	Output Deselect	High Z	I_{CC1}
L	L	H	H	Read	Data Out	I_{CC1}
X	L	H	L	Write	Data In	I_{CC1}

CAPACITANCE

(T_A = +25°C)

Parameter	Symbol	Condition	Max		Unit
			LCC	CSOJ,DIP, Flatpack	
Address Lines	C_I	V_{IN} = Vcc or Vss, f = 1.0MHz	6	12	pF
Data Lines	C_O	V_{OUT} = Vcc or Vss, f = 1.0MHz	8	14	pF

These parameters are sampled, not 100% tested.

DC CHARACTERISTICS

(V_{CC} = 5V, T_A = -55°C to +125°C)

Parameter	Symbol	Conditions		Min	Typ	Max	Units
Input Leakage Current	I_{LI}	V_{IN} = 0V to Vcc		—	—	±5	µA
Output Leakage Current	I_{LO}	$V_{I/O}$ = 0V to Vcc		—	—	±10	µA
Operating Power Supply Current	I_{CC1}	$\overline{WE}$, $\overline{CS_1}$ = V_{IL}, $I_{I/O}$ = 0mA, CS_2 = V_{IH}	(15-17ns)	—		300	mA
			(20ns)	—		225	mA
			(25-55ns)	—		200	mA
Standby (TTL) Power Supply Current	I_{CC2}	$\overline{CS_1}$ ≥ V_{IH} and/or CS_2 ≤ V_{IL}, V_{IN} ≥ V_{IH} or ≤ V_{IL}	(17-55ns)	—		25	mA
			(15ns)	—		60	mA
Full Standby Power Supply Current	I_{CC3}	$\overline{CS_1}$ ≥ Vcc -0.2V and/or CS_2 ≤ 0.2V	CS (17-55ns)	—	3	10	mA
			CS (15ns)	—	—	15	mA
		V_{IN} ≥ Vcc -0.2V or V_{IN} ≤ 0.2V	LPS	—	—	5	mA
Output Low Voltage	V_{OL}	I_{OL} = 8.0mA		—	—	0.4	V
Output High Voltage	V_{OH}	I_{OH} = -4.0mA		2.4	—	—	V

AC TEST CONDITIONS

Figure 1



Figure 2



Input Pulse Levels	Vss to 3.0V
Input Rise and Fall Times	3ns
Input and Output Timing Levels	1.5V
Output Load	Figure 1

NOTE: For t_{EHQZ}, t_{GHQZ} and t_{WLQZ}, CL = 5pF Figure 2)

AC CHARACTERISTICS – READ CYCLE (15 to 20ns)

(V_{CC} = 5.0V, V_{SS} = 0V, T_A = -55°C to +125°C)

Parameter	Symbol JEDEC	Symbol Alt.	15ns* Min	15ns* Max	17ns Min	17ns Max	20ns Min	20ns Max	Units
Read Cycle Time	tAVAV	tRC	15		17		20		ns
Address Access Time	tAVQV	tAA		15		17		20	ns
Chip Enable Access Time	tE1LQV tE2HQV	tACS tACS		15 15		17 17		20 20	ns ns
Chip Enable to Output in Low Z (1)	tE1LQX tE2HQX	tCLZ tCLZ	5 5		5 5		5 5		ns ns
Chip Disable to Output in Low Z (1)	tE1HQZ tE2LQZ	tCHZ tCHZ		6 6		7 7		8 8	ns ns
Output Hold from Address Change	tAVQX	tOH	3		3		3		ns
Output Enable to Output Valid	tGLQV	tOE		6		6		7	ns
Output Enable to Output in Low Z (1)	tGLQX	tOLZ	0		0		0		ns
Output Disable to Output in High Z(1)	tGHQZ	tOHZ		5		6		8	ns
Chip Enable to Power Up (1)	tE1LICCH tE2HICCH	tPU tPU	0 0		0 0		0 0		ns ns
Chip Enable to Power Down (1)	tE1HICCL tE2LICCL	tPD tPD		15 15		17 17		20 20	ns ns

1. This parameter is guaranteed by design but not tested.

* 15ns access time is advanced information, contact factory for availability.

AC CHARACTERISTICS – READ CYCLE (25 to 55ns)

(V_{CC} = 5.0V, V_{SS} = 0V, T_A = -55°C to +125°C)

Parameter	Symbol JEDEC	Symbol Alt.	25ns Min	25ns Max	35ns Min	35ns Max	45ns Min	45ns Max	55ns Min	55ns Max	Units
Read Cycle Time	tAVAV	tRC	25		35		45		55		ns
Address Access Time	tAVQV	tAA		25		35		45		55	ns
Chip Enable Access Time	tE1LQV	tACS		25		35		45		55	ns
Chip Enable Access Time	tE2HQV	tACS		25		35		45		55	ns
Chip Enable to Output in Low Z (1)	tE1LQX tE2HQX	tCLZ tCLZ	5 5		5 5		5 5		5 5		ns ns
Chip Disable to Output in Low Z (1)	tE1HQZ tE2LQZ	tCHZ tCHZ		10 10		15 15		20 20		20 20	ns ns
Output Hold from Address Change	tAVQX	tOH	0		0		0		0		ns
Output Enable to Output Valid	tGLQV	tOE		10		15		20		25	ns
Output Enable to Output in Low Z (1)	tGLQX	tOLZ	0		0		0		0		ns
Output Disable to Output in High Z(1)	tGHQZ	tOHZ		10		15		20		20	ns
Chip Enable to Power Up (1)	tE1LICCH tE2HICCH	tPU tPU	0 0		0 0		0 0		0 0		ns ns
Chip Enable to Power Down (1)	tE1HICCL tE2LICCL	tPD tPD		25 25		35 35		45 45		55 55	ns ns

1. This parameter is guaranteed by design but not tested.

AC CHARACTERISTICS – WRITE CYCLE (15 to 20ns)

(V_{CC} = 5.0V, V_{SS} = 0V, T_A = 0°C to +70°C)

Parameter	Symbol JEDEC	Symbol Alt.	15ns* Min	15ns* Max	17ns Min	17ns Max	20ns Min	20ns Max	Units
Write Cycle Time	tAVAV	tWC	15		17		20		ns
Chip Enable to End of Write	tE1LWH	tCW	12		13		15		ns
	tE1LE1H	tCW	12		13		15		ns
	tE2HWH	tCW	12		13		15		ns
	tE2HE2L	tCW	12		13		15		ns
Address Setup Time	tAVWL	tAS	0		0		0		ns
	tAVE1L	tAS	0		0		0		ns
	tAVE2H	tAS	0		0		0		ns
Address Valid to End of Write	tAVWH	tAW	12		13		15		ns
Write Pulse Width	tWLWH	tWP	12		13		15		ns
	tWLE1H	tWP	12		13		15		ns
	tWLE2L	tWP	12		13		15		ns
Write Recovery Time	tWHAX	tWR	0		0		0		ns
	tE1HAX	tWR	0		0		0		ns
	tE2LAX	tWR	0		0		0		ns
Data Hold Time	tWHDX	tDH	0		0		0		ns
	tE1HDX	tDH	0		0		0		ns
	tE2LDX	tDH	0		0		0		ns
Write to Output in High Z (1)	tWLQZ	tWHZ	0	7	0	8	0	8	ns
Data to Write Time	tDVWH	tDW	7		8		10		ns
	tDVE1H	tDW	7		8		10		ns
	tDVE2L	tDW	7		8		10		ns
Output Active from End of Write (1)	tWHQX	tWLZ	3		3		3		ns

1. This parameter is guaranteed by design but not tested.

AC CHARACTERISTICS – WRITE CYCLE (25 to 55ns)

(V_{CC} = 5.0V, V_{SS} = 0V, T_A = 0°C to +70°C)

Parameter	Symbol JEDEC	Symbol Alt.	25ns Min	25ns Max	35ns Min	35ns Max	45ns Min	45ns Max	55ns Min	55ns Max	Units
Write Cycle Time	tAVAV	tWC	25		35		45		55		ns
Chip Enable to End of Write	tE1LWH	tCW	20		25		35		45		ns
	tE1LE1H	tCW		16		20		25		40	ns
	tE2HWH	tCW	16		20		25		40		ns
	tE2HE2L	tCW		16		20		25		40	ns
Address Setup Time	tAVWL	tAS	0		0		0		0		ns
	tAVE1L	tAS	0		0		0		0		ns
	tAVE2H	tAS	0		0		0		0		ns
Address Valid to End of Write	tAVWH	tAW	20		25		35		45		ns
	tAVEH	tAW	20		25		35		45		ns
Write Pulse Width	tWLWH	tWP	20		30		30		35		ns
	tWLE1H	tWP	20		30		30		35		ns
	tWLE2L	tWP	20		30		30		35		ns
Write Recovery Time	tWHAX	tWR	0		0		5		5		ns
	tE1HAX	tWR	0		0		5		5		ns
	tE2LAX	tWR	0		0		5		5		ns
Data Hold Time	tWHDX	tDH	0		0		0		0		ns
	tE1HDX	tDH	0		0		0		0		ns
	tE2LDX	tDH	0		0		0		0		ns
Write to Output in High Z (1)	tWLQZ	tWHZ	0	10	0	13	0	15	0	20	ns
Data to Write Time	tDVWH	tDW	15		20		20		25		ns
	tDVE1H	tDW	15		20		20		25		ns
	tDVE2L	tDW	15		20		20		25		ns
Output Active from End of Write (1)	tWHQX	tWLZ	3		3		3		3		ns

1. This parameter is guaranteed by design but not tested.

FIG. 2 TIMING WAVEFORM - READ CYCLES

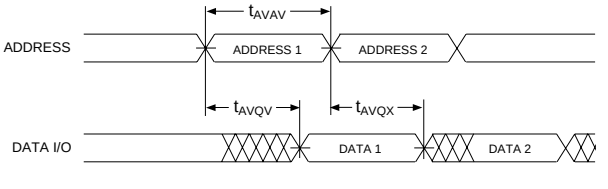

READ CYCLE 1 ($\overline{WE}$ HIGH; $\overline{OE}$, $\overline{CS}$ LOW)

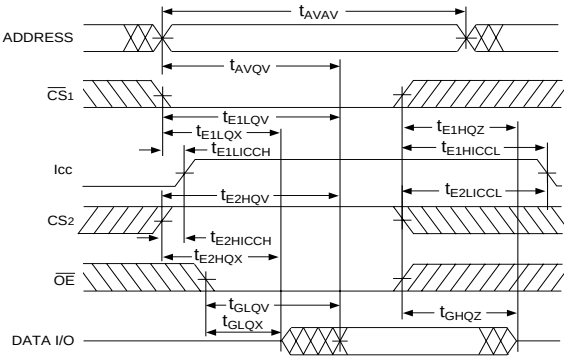

READ CYCLE 2 ($\overline{CS}_1$ AND/OR CS_2 CONTROLLED, $\overline{WE}$ HIGH)

FIG. 3 WRITE CYCLE 1

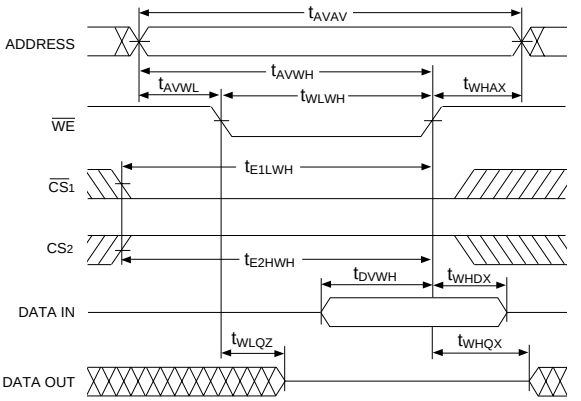

WRITE CYCLE 1 - LATE WRITE, $\overline{WE}$ CONTROLLED

FIG. 4 WRITE CYCLES 2

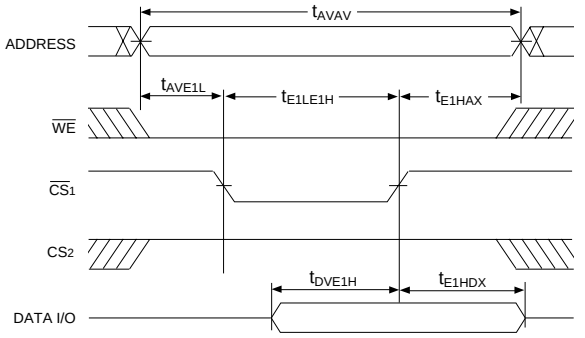

WRITE CYCLE 2 - EARLY WRITE, $\overline{CS}_1$ CONTROLLED

WRITE CYCLES 3

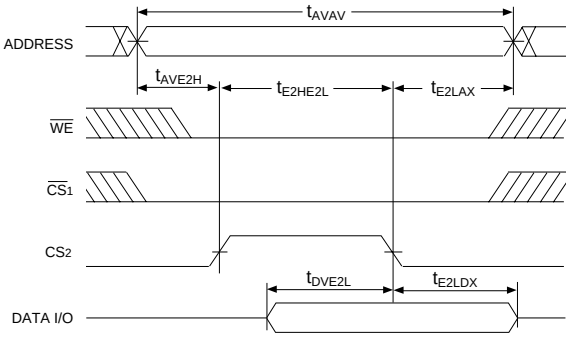

WRITE CYCLE 3 - EARLY WRITE, CS_2 CONTROLLED

DATA RETENTION CHARACTERISTICS (EDI88130LPS ONLY)

(T_A = -55°C to +125°C)

Characteristic Low Power Version only	Sym	Conditions	Min	Typ	Max	Units
Data Retention Voltage	V_{DD}	V_{DD} = 2.0V	2	–	–	V
Data Retention Quiescent Current	I_{CCDR}	$\overline{CS}_1 \geq V_{DD}$ -0.2V and/or $CS_2 \geq V_{SS}$ +0.2V	–	0.5	2	mA
Chip Disable to Data Retention Time (1)	T_{CDR}	$V_{IN} \geq V_{DD}$ -0.2V	0	–	–	ns
Operation Recovery Time (1)	T_R	or $V_{IN} \leq$ 0.2V	T_{AVAV}*	–	–	ns

NOTE:

1. Parameter guaranteed by design, but not tested.

* Read Cycle Time

FIG. 5
DATA RETENTION - $\overline{CS}_1$ CONTROLLED

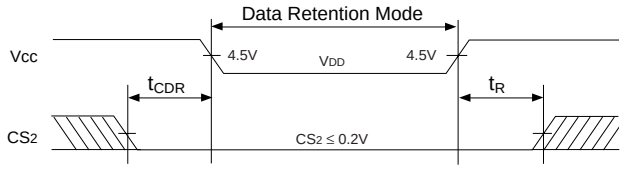

DATA RETENTION, CS_2 CONTROLLED

FIG. 6
DATA RETENTION - CS_2 CONTROLLED

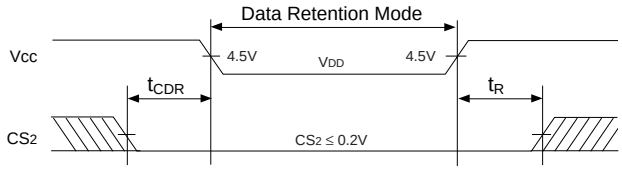

DATA RETENTION, CS_2 CONTROLLED

PACKAGE 12: 32 PIN CERAMIC QUAD LCC

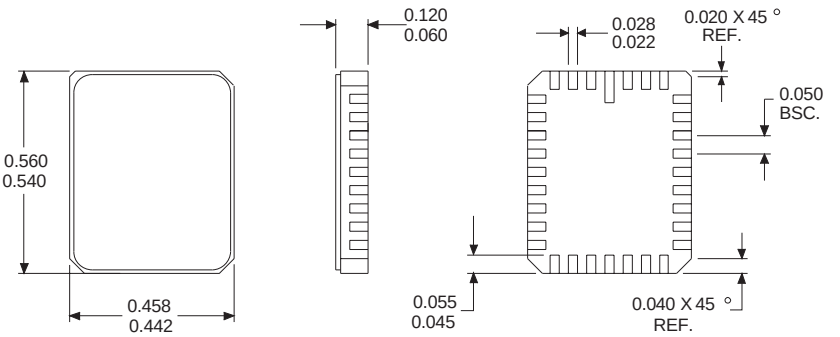

ALL DIMENSIONS ARE IN INCHES

PACKAGE 9: 32 PIN SIDEBRAZED CERAMIC DIP (600 mils wide)

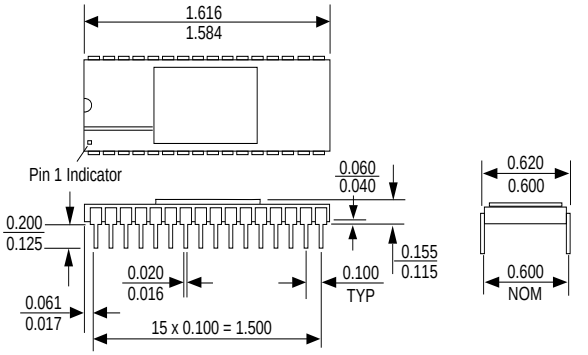

ALL DIMENSIONS ARE IN INCHES

PACKAGE 102: 32 PIN SIDEBRAZED CERAMIC DIP (400 mils wide)

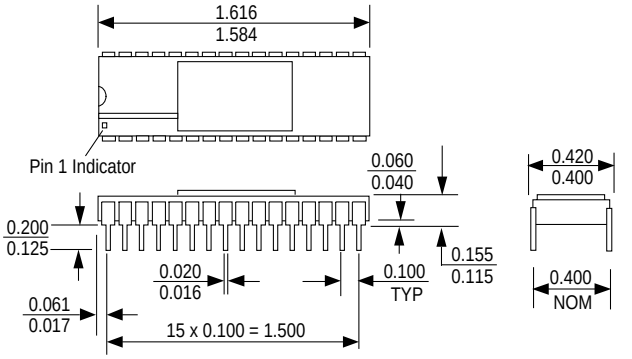

ALL DIMENSIONS ARE IN INCHES

PACKAGE 140: 32 LEAD CERAMIC SOJ

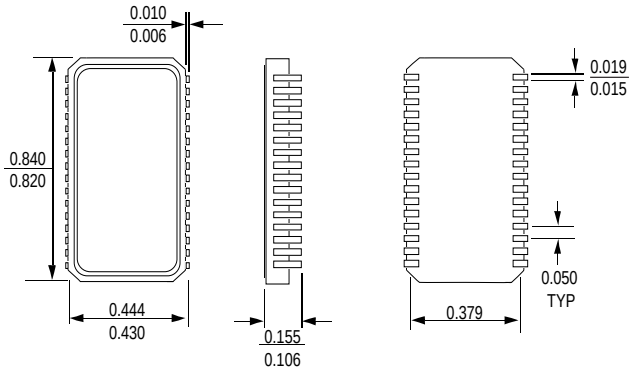

ALL DIMENSIONS ARE IN INCHES

PACKAGE 141: 32 PAD CERAMIC LCC

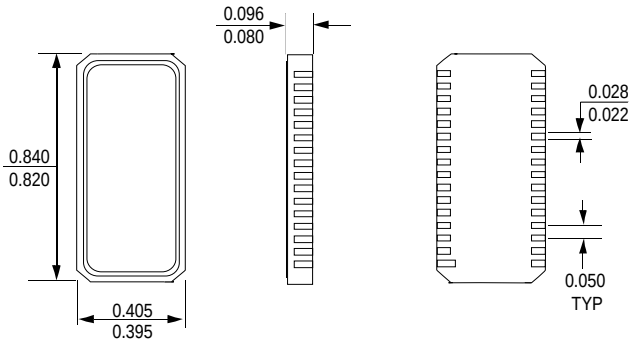

ALL DIMENSIONS ARE IN INCHES

PACKAGE 142: 32 PIN CERAMIC FLATPACK

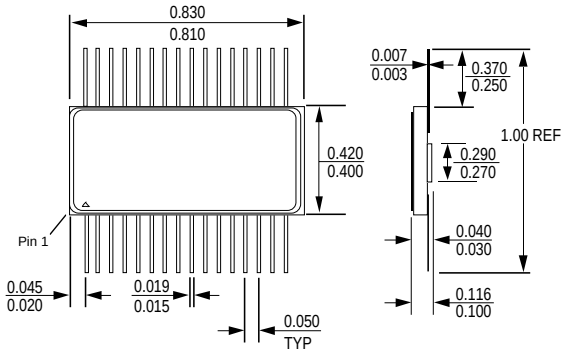

ALL DIMENSIONS ARE IN INCHES

ORDERING INFORMATION

EDI 8 8 130 CS X X X

WHITE ELECTRONIC DESIGNS

SRAM

ORGANIZATION, 128Kx8
(130 = Dual CS)

TECHNOLOGY:
CS = CMOS Standard Power (5V)
LPS = Low Power

ACCESS TIME (ns)

PACKAGE TYPE:
C = 32 lead Sidebrazed DIP, 600 mil (Package 9)
F = 32 lead Ceramic Flatpack (Package 142)
L = 32 pad Ceramic LCC (Package 141)
L32 = 32 pad Ceramic Quad LCC (Package 12)
N = 32 lead Ceramic SOJ (Package 140)
T = 32 lead Sidebrazed DIP, 400 mil (Package 102)

DEVICE GRADE:

B =	MIL-STD-883 Compliant	
M =	Military Screened	-55°C to +125°C
I =	Industrial	-40°C to +85°C
C =	Commercial	0°C to +70°C